

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
24 December 2003 (24.12.2003)


PCT

(10) International Publication Number  
**WO 03/106788 A1**

- (51) International Patent Classification<sup>7</sup>: **E04H 17/18**, 17/16
- (21) International Application Number: **PCT/SE03/00900**
- (22) International Filing Date: **4 June 2003 (04.06.2003)**
- (25) Filing Language: **Swedish**
- (26) Publication Language: **English**
- (30) Priority Data:  
**0201781-2** **12 June 2002 (12.06.2002)** **SE**
- (71) Applicant (for all designated States except US): **GUNNEBO TROAX AB** [SE/SE]; Box 89, S-330 33 Hillerstorp (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **HERBERTSSON, Ronny** [SE/SE]; Kävsjö, Linnegård 2, S-330 33 Hillerstorp (SE).
- (74) Agents: **WALLENGREN, Yngvar** et al.; Patentbyrå Y Wallengren AB, Box 116, S-331 21 Värnamo (SE).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE (utility model), DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: A SYSTEM FOR SCREENING OFF AND A METHOD OF MOUNTING THEREOF

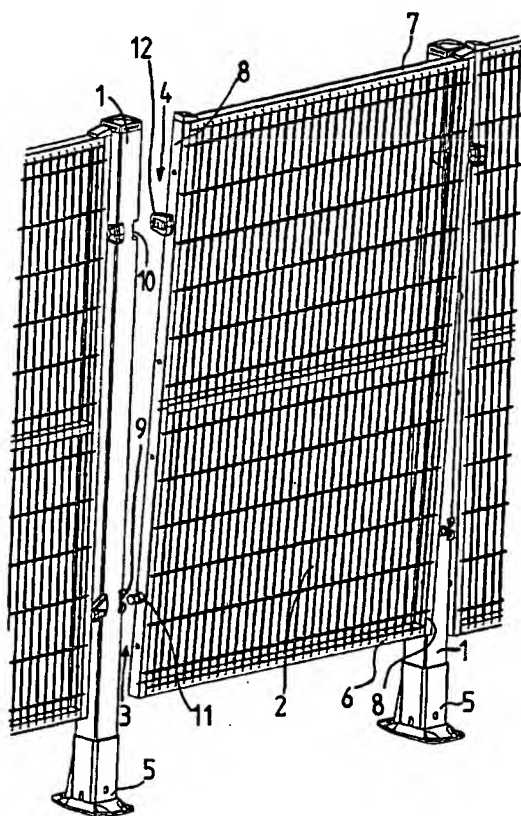

(57) Abstract: In a system for screening off an area, a partition element (2) substantially covers the space between two upstanding carrier elements (1). The partition element (2) is catchable in the carrier elements (1) in a temporary, unstable preparatory position. The partition element (2) lacks the capability of remaining in the preparatory position by its own force. The partition element (2) is further movable from the preparatory position to a fixedly locked position in the carrier elements (1). In a method on mounting and dismounting of a partition element (2) on two upstanding carrier elements (1), the partition element (2) is hooked in the carrier elements (1) in the preparatory position. Thereafter, the partition element (2) is moved to a fixedly locked position in the carrier elements (1).

WO 03/106788 A1

WO 03/106788 A1



**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*